


Hookup diagram for Prescaler kit

9/20/2005, Chuck Olson, WB9KZY

Jackson Harbor Press
<http://jacksonharbor.home.att.net/>
jacksonharbor@att.net

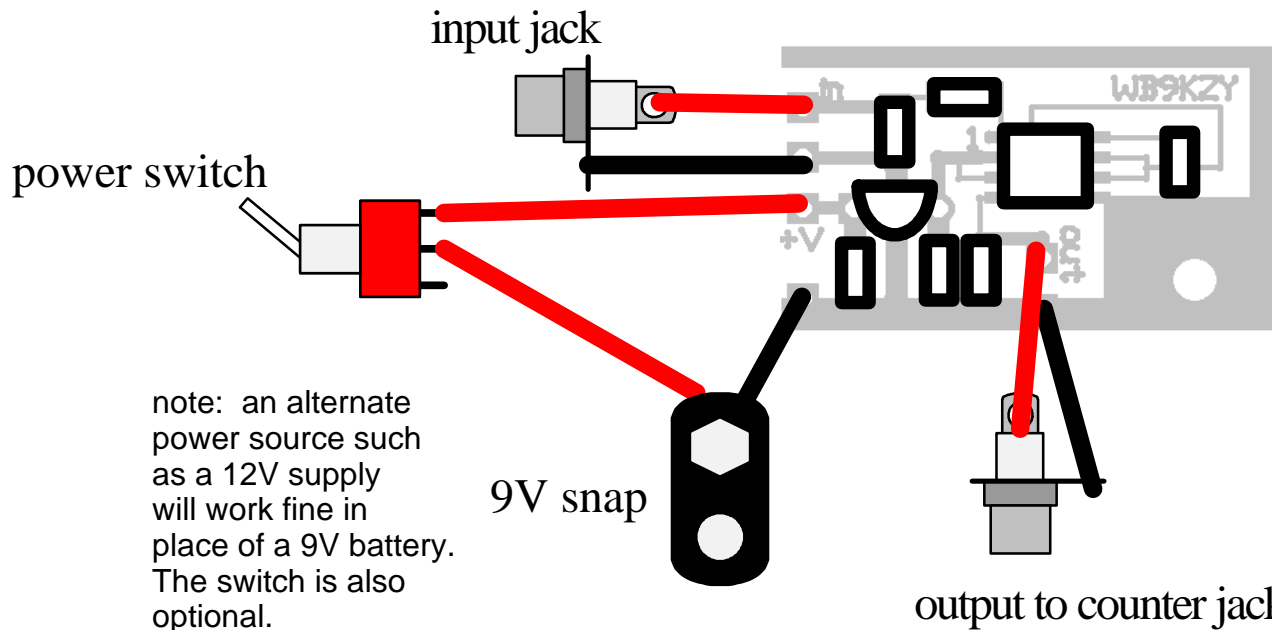

note: an alternate power source such as a 12V supply will work fine in place of a 9V battery. The switch is also optional.

note that the builder may need to use a 1000 pf series capacitor in place of the wired connection to the center contact of the jack for some counters.